



ceccato
wash systems



Wash Proposal

Ceccato Pegasus Air Plus Rollover Unit

January 2010

Introduction

Ceccato Wash Systems holds the Australian distribution rights for the Ceccato and MacNeil range of car washing equipment. For more information on Ceccato Wash Systems please visit our website at www.ceccatocarwash.com.au.

This document has been produced to provide detailed information about the Ceccato Pegasus car wash. For a personalized quotation please contact us on 1300 155 115.

Ceccato Italia

Ceccato is Italy's largest manufacturer of vehicle wash systems. A privately owned company, Ceccato has more than 53 years of continuous experience in the design and production of car, truck, bus, tram, train washing and wastewater recycling equipment.

The Ceccato vehicle wash equipment manufacturing plant is located in Alte di Montecchio Maggiore (VI), Italy with an undercover production area in excess of 20,000 square metres. Ceccato employs a total of 300 people, has an average production of 1100 wash systems per year and has subsidiaries in Europe, North and South America, the Middle East, North Africa, Australia and Indochina. Ceccato Wash Systems is the Australian distributor of Ceccato S.p.A.

Ceccato is a preferred supplier of vehicle washing systems to major international oil companies including Chevron Corporation, BP, Aral, Shell, Esso and Total. Ceccato machines are used by Ferrari, Maserati and Alfa Romeo in their factories to wash new cars before they are sent to showrooms for sale.

Ceccato S.p.A has been under continuous Ceccato family management since inception and is one of the most financially stable companies in the industry, worldwide.

Ceccato Wash Systems is able to offer full 24/7 technical support, service and maintenance of the Ceccato range of vehicle wash systems throughout Australia.



Ceccato S.p.A's corporate headquarters in Vicenza, Italy.



Ceccato Pegasus Carwash System



System Overview

The Pegasus Air Plus, Ceccato's top of the range roll over car wash, effectively combines technological innovation with state of the art Italian design. High quality engineering, construction and technology ensure reliability, durability and wash quality. As a market leading machine the Pegasus Air Plus offers considerable value for money and low maintenance and operating expenses.

The Pegasus Air Plus is designed for medium to high volume locations and is perfect for car dealerships, service stations and independent car wash operators.



Ceccato vehicle washes in standard configuration embody true Italian design flair and are constructed to the highest standards with features such as a hot dipped galvanized frame.

The Pegasus range is available in customized colours and can be branded to match the corporate profile of your business.



Traffic lights on the left and right sides of the gantry guide the vehicle to a stationary position in the middle of the rails.

The driver may exit the vehicle or remain inside as desired.

Signage to remind the driver to remove aerials, roof racks and put up windows are recommended.



On first pass the gantry emits an emollient in mist form that coats the vehicle. This chemical is designed to break down dirt and other contaminants that have accumulated on the surface of the vehicle.





The second pass of the gantry sees oscillating high pressure jets blast streams of water at a myriad of angles effectively and powerfully remove the majority of dirt and contaminants from the surface of the vehicle.



Pre washing of the vehicle is carried out using separate arches, equipped with suitable nozzles that deliver specific detergents.



MemoLine, the vectorial recognition system that tracks the vehicle profile with the utmost precision guarantees accurate, uniform, and thorough cleaning of the vehicle.



Electronically controlled wash cylinders ensure an even and gentle submersion on all types of car shapes. Vehicle surfaces are thoroughly washed with an automatic rotation direction change in both the forward and return cycles.

The machine is equipped with a photocell control system that guides roof and side brushes around the contours of the car with precision.





To protect the inner mechanisms from external agents and damage the wheel wash devices are fitted inside thermoformed cases – striking both in terms of practicality and design.



All shadow zones that could be created during the wash cycle are eliminated by the effective movement of all brushes as controlled by Memoline.



The Pegasus emits a polishing agent that completely covers the vehicle. The roof and side brushes then vigorously polish all accessible surfaces.



The final pass of the gantry before the drying phase is the osmotic rinse. This process maximises the drying effect.





The oscillating drying fans of the Pegasus Air Plus are a key feature. This patented drying technique delivers unprecedented results from the perspective of quality and safety.



Both air flows oscillate together with a synchronous movement and their rotation speed is in relation to gantry translation speed in order to achieve optimal drying results.



Technical Features

3.2 MAIN COMPONENTS


3.2.1 BLOCK LAYOUT OF THE MACHINE

1. Working area, marked on the floor and equipped with warning signals.
2. Pegasus washing unit
3. Gantry sliding rails.
4. Structure for the movement of the energy chain.
5. Control desk.
6. Self service control station (option)
7. Technical room (high pressure pumps, osmotic water, etc.)



3.2.2 MAIN COMPONENTS OF THE MACHINE

1. Gantry column containing the electrical cabinet
2. Column containing the hydraulic equipment and wash chemicals
3. Top brush equipped with up and down movement (n. 1)
4. Wheel wash device, with rotating brushes (option)
5. Gantry rails (no. 2)
6. Wheels driver vehicles (no. 2)
7. Signalisation and positioning device.

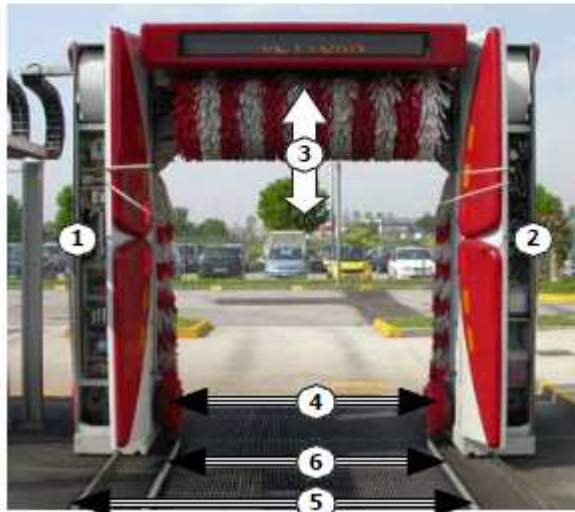


- 8. Splash guards (no. 2)
- 9. Side brushes (no. 2) with cross movement
- 10. Support frame of the cable and pipes energy supply chain.
- 11. Electrical box to connect the power supply and the external units.



12. The drying system includes:

- The horizontal working group includes one contour following nozzle, which moves up and down during the translation of the gantry over the vehicle.
The nozzle is equipped with two air blowers of 3 kW(4HP) each, fitted at both ends of the nozzle.
To increase the air flow efficiency, the top dryer is also equipped with the TSD system (patented). The unit can be optionally equipped with spraying nozzles for high or medium pressure wash and with pre-wash chemical nozzles.
- The vertical working group includes two side drying nozzles which are mounted on the opposite gantry columns. Each nozzle is equipped with one 4 kW (5,5HP) air blower, fitted on top of the relevant gantry column.

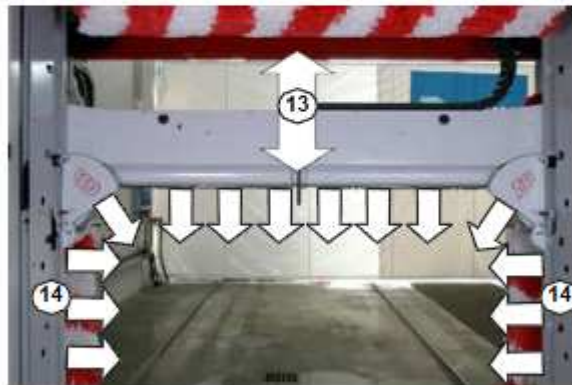


3.2.3 PEGASUS AIRPLUS

The drying system includes:

- 1. Top section, including two oscillating drying nozzles, installed under the gantry top cross beam.
- 2. The vertical working group includes two side drying nozzles which are mounted on the opposite gantry columns. Each nozzle is equipped with one air blower, fitted on top of the relevant gantry column.



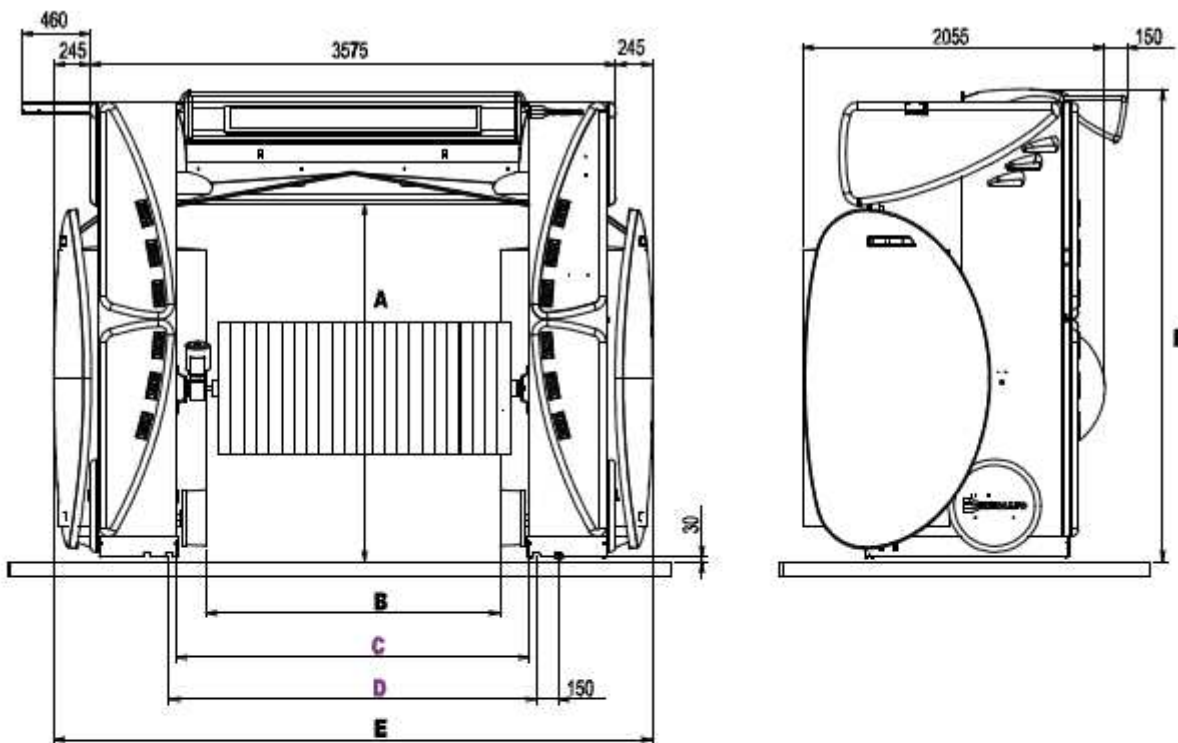

			Pegasus 240	Pegasus 260	Pegasus 285
Total weight (#)	kg	(lb)	1600 - 1700 (3500 - 3800)		
Height (A)	mm	(in)	2430 (95 ^{3/4})	2630 (103 ^{1/2})	2880 (113 ^{1/2})
Width (B)	mm	(in)	2000 / 2300 # (78 ^{3/4} / 90 ^{1/2} #)		
Width (C)	mm	(in)	2400 / 2700 # (94 ^{1/2} / 106 ^{1/4} #)		
Rails distance (D)	mm	(in)	2500 / 2800 # (98 ^{1/2} / 110 ^{1/4} #)		
Width (E)	mm	(in)	4065 - 4365 #		
Height (F)*	mm	(in)	3215 (126 ^{1/2})	3415 (134 ^{1/2})	3665 (144 ^{1/4})

(#) Pegasus 240L - 260L - 285L

(*) With or without the display



6.12 PROGRAMMES - TIMES – CONSUMPTIONS

In the following table are listed some typical washing programmes, with the relevant cycle times and consumptions, measured on a medium length vehicle.

Program			runs	Time	Recycled water	Clean water	Air	Power	Smoothers	Shampoo Foam	Wax	Super wax	Sonax
					litre	litre	litre	kW/h	g	g	g	g	g
			min	gal.	gal.	gal.	HP/h	oz	oz	oz	oz	oz	
				(uk)	(uk)	(uk)							
1	Forward:	Wax + Drying	2	1'40"	-	15	-	0.55	-	-	12	-	-
	Return:	Drying			4		0.74		0.45				
2	Forward:	Washing + Shampoo	4	3'10"	60	15	5	0.71	-	20	12	-	-
	Return:	Washing + Wax			16	4	1.5	0.95		0.7	0.45		
	Forward:	Drying			13	3.3	1						
3	Forward:	Washing + Shampoo + Finishing	4	3'40"	70	15	20	0.74	-	22	12	-	-
	Return:	Washing + Finishing + Wheels washer + Wax			19	4	5	1		0.78	0.45		
	Forward:	Drying			15	3.3	4						
4	Forward:	Multicolor /PreFoam+ Washing + Finishing + Side high pressure + Robowash	4	3'40"	120	25	50	1.30	-	26	18	-	-
	Return:	Washing + Finishing + Wheels washer + Hot wax			32	7	13	1.74		0.9	0.65		
	Forward:	Wax + Drying			26	6	11						
5	Forward:	Multicolor	6	4'30"	75	15	60	0.94	-	26	-	15	-
	Return:	Washing + Finishing + Wheels washer washing + Finishing			20	4	16	1.25		0.9			
	Forward:	Hot wax			17	3.3	13						
6	Forward:	Hot smoother	6	5'10"	160	25	70	1.72	80	20	18	-	-
	Return:	Total high pressure			42	7	19	2.3	3	0.7	0.65		
	Forward:	Washing + Shampoo + Finishing + Wheels washer			35	6	16						
7	Forward:	Multicolor	8	7'30"	120	15	140	1.5	-	26	12	-	100
	Return:	Washing + Finishing + Wheels washer			32	4	37	2		0.9	0.45		3.5
	Forward:	Formel Plus Sonax			26	3.3	31						



Ceccato Wastewater Recycling System

Different sites may be required to install a wastewater recycling system in conjunction with their Pegasus Carwash. For other sites it will be optional.

The Ceccato Wastewater recycling system is designed to recycle 90% of the water that can be collected from the vehicle wash process. This normally equates to around 80-85% of the total water used, resulting in savings in water and effluent costs of up to 85%. The system will deliver clear recycled water to the pre-wash foam and brush wash stations at the maximum rate of 5000 litres per hour.

The system will receive water from an aerated settlement tank connected to the wash bay drain (customer to supply) and deliver it to the media filtration system where dirt particles will be removed.

pH levels are automatically monitored during the transfer of wastewater from the settlement tank. The partially treated water will drain to a secondary holding tank (not included in our price) which will also be aerated by the Ceccato system to effectively odour control and pH adjust as required.

The secondary holding tank/compartment will be fitted with an automatic level control for fresh water top-up on demand. The Ceccato Wastewater Recycling System is equipped with a fully programmable process control.



Vacuums

Ceccato Wash Systems distributes product from a number of vacuum manufacturers. Our most reliable system is the Daerg vacuum system in. The Daerg system – being European manufactured is not the cheapest option, but we have had Daerg systems operating for over 8 years with no issues. We have both single and double vacuum units depending on your layout configuration.

The vacuums are built with high quality materials and suitable for outdoor installation.

The vacuums are controlled by PLC and are equipped with an illuminated display to check the number of cycles, modify operation time and check possible machine faults.

Vacuums are equipped with coin/token operated lighting system, filter shaking device and a new dust collection system with disposable bag, which is very practical and easy to replace. The vacuum has the following specifications:

- Made of stainless steel and ABS.
- Prepared for floor anchoring.
- Lighting column can be installed on the left or right side.
- Controls 24 Volt.
- Adjustable timer.
- Self-Service: coin or token operated.
- Power pilot lamp.
- Emergency STOP button.
- CE certification.



Preventative Maintenance

The key to efficient equipment operation is effective and timely equipment maintenance. The Operators Manual contains recommended preventative maintenance procedures; however, we recommend consideration to acceptance of a Ceccato Wash Systems Pty Ltd Preventative Maintenance Program to provide regular routine preventative maintenance inspections to keep the equipment in peak operating condition.

Our nominated service technician will be a member of the installation team at your site to ensure complete familiarity with the installation and all prevailing site conditions. The service technician will be based in Sydney and will be available on a call-out basis.

Preventative Maintenance Program

After execution of our Servicing & Maintenance Agreement, Ceccato Wash Systems will visit your site once monthly to inspect the washing system and carry out preventative maintenance service. Preventative maintenance service shall be conducted during business hours between Monday and Friday.

Once monthly service will consist of:

1. Inspect all lubrication points and lubricate as necessary
2. Check all spray nozzles and clear any blockages
3. Check system activation
4. Inspect cable train, cables, hoses and connections
5. Inspect wheel guides for damage, remove any floor debris
6. Check wheel guide floor fasteners
7. Check all sensors and switches
8. Check brushes for wear
9. Check dosing adjustments, adjust as necessary
10. Check recycled water for odour and clarity
11. Inspect and clean oil / water separation system
12. Check position and condition of signs, traffic lights and bay lighting
13. Run a vehicle through a complete standard wash program & inspect the result for effectiveness – adjust as necessary
14. Inspect and operate any supporting equipment under service
15. Check chemical levels and report to user for replacement
16. Prepare service report and submit to user

Ceccato Wash Systems Pty Ltd will not be responsible for the cost of repair or replacement as a result of user modifications, damage caused by vandalism or other causes outside Ceccato Wash Systems Pty Ltd control.



Non-Scheduled Maintenance (National 1300 799 463)

Ceccato Wash Systems Pty Ltd will provide non-scheduled maintenance on the designated system at the designated site upon receipt of a request from the customer. Ceccato Wash Systems Pty Ltd will contact the site within 60 minutes of customer notification and attend the site within one working day of receipt of the customer request.

Upon attendance at the designated site, Ceccato Wash Systems Pty Ltd will determine whether the maintenance is warranty related or customer responsibility before incurring any expense other than for site attendance. No additional expense will be incurred unless and until the customer provides necessary authorization.

If service is deemed to be warranty related, Ceccato Wash Systems Pty Ltd will secure approval to proceed with repairs / replacement under warranty conditions on behalf of the customer.

Ceccato Wash Systems Pty Ltd will maintain stock of spare parts at our service base that it deems appropriate to suit the system.

Ceccato Wash Systems Pty Ltd will maintain stock of spare parts at our service base that it deems appropriate to suit the system.

Our current maintenance charges (subject to change) are:

Hourly Service Rates: Non Scheduled Maintenance Charges (non warranty)

- Hourly Rate 7.30am to 5pm Monday to Friday = \$95.00 per hour
- Hourly Rate Outside Normal Hours = \$135.00 per hour
- Hourly Rate Public Holiday / Sunday = \$135.00 per hour
- Call Out Travel Allowance = 1 Hour
- Minimum Site Charge = 1 Hour



Routine Inspections

Ceccato Wash Systems Pty Ltd recommends that the following weekly maintenance checks are carried out by the operator.

1. Inspect chemical levels
2. Inspect drains and pits for debris or obstructions
3. Check automatic system activation
4. Observe one full wash cycle by automatic vehicle activation

It is also recommended that the wash bay be kept clean and free of waste materials and debris and that grated drain covers are not obstructed.

In the event that any malfunction is observed, Ceccato Wash Systems is available 24/7 on 1300 799 463 for service and support from our service base.



Equipment Pricing

Our price to supply, deliver and install the following equipment as described is:

Pegasus Air Plus Car Wash Machine **\$128,603 plus GST**

Optional Extras

2 x 7,5 kW piston pump complete with starter	\$19,395 plus GST
Wheelwasher with plastic casing	\$5,879 plus GST
Foam Touch Light Brushes	\$7,271 plus GST
Omega shaped 9 mt pre-galvanised rails	\$3,193 plus GST
200 lt/h osmotised water producer with chemical water softening (requires storage tank for osmotised water and relevant pump – customer to supply)	\$12,428 plus GST
Splash guards	\$1,843 plus GST

Additional Options to Consider:

Ceccato Wastewater Recycling System	\$19,500 plus GST
Vacuum System (Single)	\$4,800 plus GST each
Vacuum System (Double)	\$8,200 plus GST each

Note:

This pricing is fully inclusive of all international freight, supply, delivery and installation costs.

Our trading terms for equipment and installation are 50% with order, 30% upon arrival to Australian Customs and the balance upon final commissioning unless varied by separate written agreement. L/C arrangements are acceptable.

The payment price utilizes a Euro/AUD conversion rate of **0.61**. Any strengthening of the Euro above this conversion rate will result in an increased charge to bring about parity.



Exclusions

Offers contained in this proposal do not include,

- Power Supply to the Site
- Water Supply to the Site
- Sewer Line Extension or Connection
- State and Local Authority Approvals
- Landlord Approval
- Excavation or Concrete Cutting other than footings and essential wash bay drainage
- Delays Beyond our Control (including adverse weather)
- Fencing
- Road or Pavement Works
- Signs
- State or Local Government Fees and Charges
- Landscaping
- Additional Work Due to any Variations to the Site or Equipment Plan
- Additional transport, storage or demurrage charges should the customer not immediately be able to take delivery of the equipment once it clears Australian Customs.

Warranty

All equipment supplied by Ceccato Wash Systems Pty Ltd has been tested and inspected at the plant and is warranted to be free from defects in material and workmanship. All equipment, is warranted for a period of one (1) year. Any part that proves, upon our examination, to be defective, will be replaced without charge. In the event of repair or replacement, this one (1) year warranty is non-cumulative. This warranty shall not apply to equipment and parts subjected to abusive or improper use, lack of maintenance or accident and shall not cover normal wear and tear or to certain wearable components such as seals. This warranty also does not apply to equipment and components used with chemicals not approved by Ceccato Wash Systems. Except as expressly stated herein, Ceccato Wash Systems is never liable for damages of any kind in connection with the purchase, maintenance or use of this equipment, including loss of profit and any and all consequential damages.

THE WARRANTY EXPRESSED HEREIN IS IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED OR FITNESS FOR A PARTICULAR PURPOSE.

Ceccato Wash Systems does not authorise anyone to enter into any agreement or assume any obligations or liabilities in connection with this Warranty. This Warranty applies to the original Ceccato Wash Systems equipment purchaser only and is not transferable.



Trading Terms

Our trading terms for equipment and installation are 50% with order, 30% upon arrival to Australian Customs and the balance upon final commissioning unless varied by separate written agreement. L/C arrangements are acceptable.

If additional transport, storage or demurrage charges are incurred due to the customer not being able to take delivery of the equipment, they are payable upon receipt of invoice from our freight forwarder.

The payment price utilizes a Euro/AUD conversion rate of **0.61**. Any strengthening of the Euro above this conversion rate will result in an increased charge to bring about parity.

Sincerely

Paul White
Sales Director

On behalf of.....
I accept this proposal and the charges, terms and conditions herein.

.....
Director

Ceccato Wash Systems Pty Ltd has taken reasonable efforts to ensure that the foregoing information, pricing, specifications, capacities and dimensions are accurate and applicable at time of publication. Ceccato Wash Systems Pty Ltd will not be liable for errors or omissions that may occur. Technical specifications and performance standards may change without notice.

18/35-39 Higginbotham Road Gladesville NSW 2111
Phone 1300 155 115
www.ceccato-carwash.com.au



